
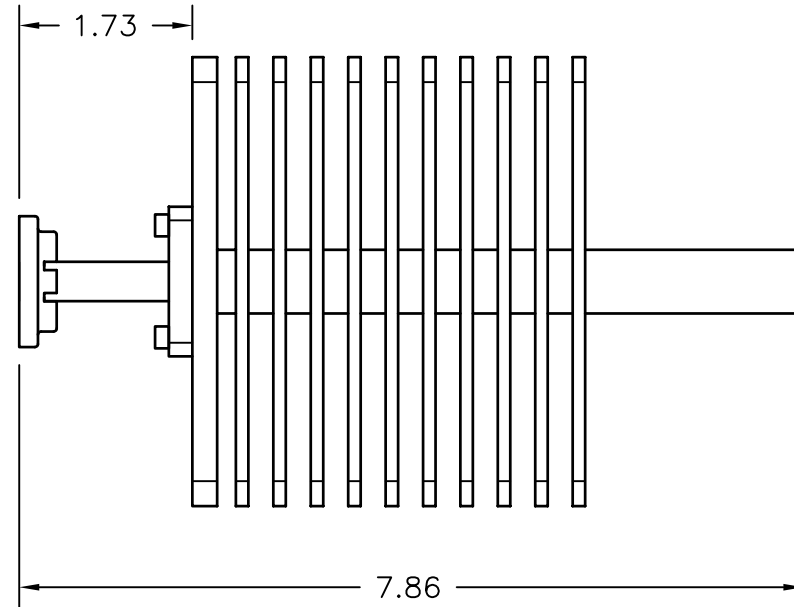


REV. A	AUTH. RL	DATE 10/10/02	INITIAL RELEASE	APPROVED
REV. B	AUTH. JLE	DATE 10/11/02	LENGTH 7.5" WAS 7.75", DIM 1.69" WAS 1.94" CORNER CHAMFERS .25" WERE .125"	APPROVED
REV. C	AUTH. JLE	DATE 12/10/02	4.5" SQ. FINS WERE 4" SQ., CLEAR DIST 1.73" WAS 1.69"	APPROVED
REV. D	AUTH. RL	DATE 10/30/03	UPDATED FORMAT, NOTES	APPROVED
REV. E	AUTH. RL	DATE 11/14/03	LENGTH 7.86 WAS: 7.50	APPROVED
REV. F	AUTH. M.R.	DATE 11/12/09	FREQ. RANGE CORRECTED, WAS 11.9-18.0 GHz	APPROVED

WR62 FLANGE PER ORDER
SEE TABLE BELOW
(COVER SHOWN)

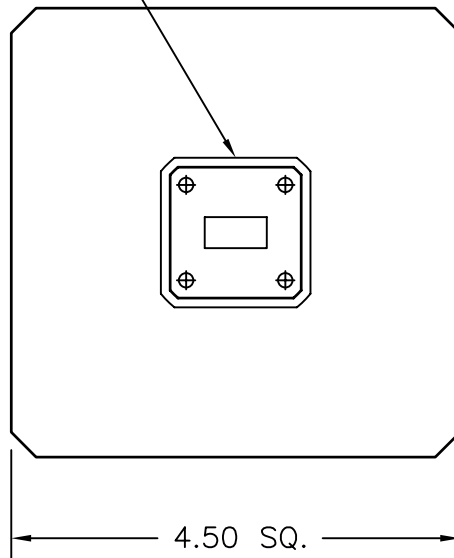

PERFORMANCE SPECIFICATIONS

MODEL CODE: 62-760-FLANGE TYPE*
 EX.: 62-760-6 = COVER
 FLANGE: WR62 ALUM.
 FREQ. RANGE: 12.4 - 18.0 GHz
 POWER: 1400W AVG.
 VSWR: 1.15 MAX.
 FINISH: HIGH TEMP BLACK
 FLANGE TYPE: SEE TABLE

*ATM MODEL # DESIGNATION FOR COMMON FLANGE TYPES
1 = CPRG
2 = CPRF
6 = UG COVER
7 = UG CHOKE
8 = SPECIAL

MATERIAL 6061/T-6 ALUM.	TREATMENT -	DRAWN R. LYNCH	DATE 10/10/02			
FINISH HI-TEMP BLACK	MOD NO. 62-760-X	CHECKED	DATE			
OUTLINE, WR62 '760' SERIES VERY HIGH POWER TERMINATION		APPROVED	DATE			
		CAGE CODE: OR8N4	DO NOT SCALE DWG			
ADVANCED TECHNICAL MATERIALS, INC. 49 RIDER AVE., PATCHOGUE N.Y. 11772 TEL: (631) 289-0363 FAX: (631) 289-0358 http://www.atmmicrowave.com		UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES	FRACTIONS ±1/64	DECIMALS ±.01	ANGLES ±1/2°	SHEET. 1/1
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT THE PRIOR WRITTEN CONSENT OF ATM, INC.			SCALE 1:2	DWG. NO. 5150W	REV. F	