


REV A	AUTH RL	DATE 07/22/02	INITIAL RELEASE
REV B	AUTH RL	DATE 05/12/06	REDRAWN TO SHOW SMA CONNECTORS AT COUPLED PORTS, WERE TYPE-N. $\triangle B1$ WAS: 2.75 MAX.
REV C	AUTH RL	DATE 11/13/06	MOUNTING HOLES CHANGED, WERE: #4-40 TAP x 4 PLC.
REV D	AUTH M.R.	DATE 8/20/10	MODEL# CORRECTED IN TITLE, WAS CHP235H-35

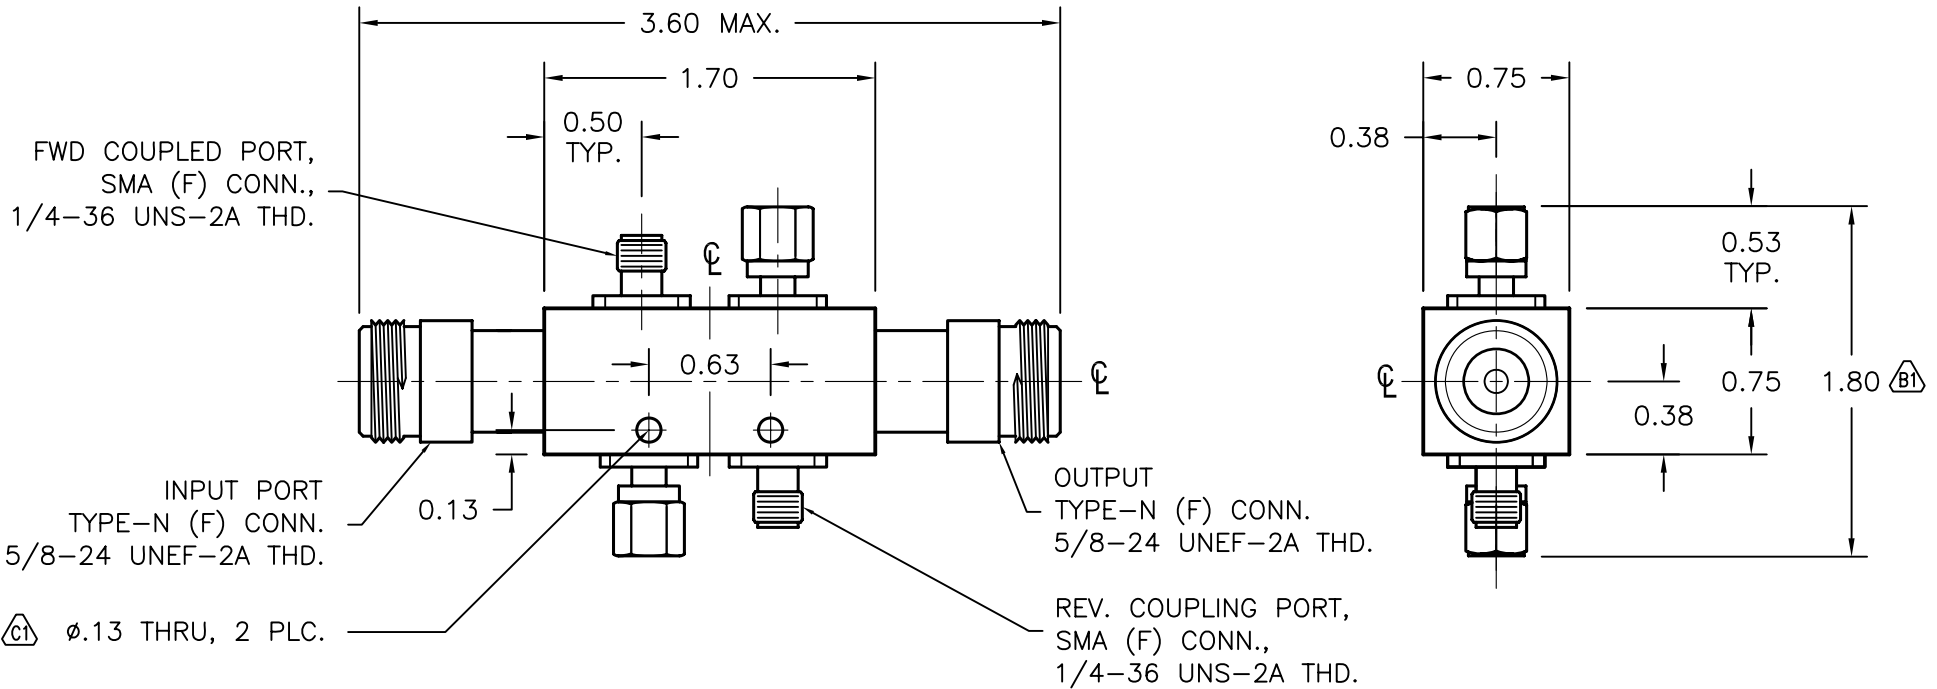

THIRD ANGLE PROJECTION:		APPROVALS	DATE		ADVANCED TECHNICAL MATERIALS, INC. TEL: (631) 289-0363 FAX: (631) 289-0358 www.atmmicrowave.com		THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT THE PRIOR WRITTEN CONSENT OF ATM, INC. DO NOT SCALE DWG.	
UNLESS OTHERWISE NOTED, DIMENSIONS ARE IN INCHES, TOLERANCES ARE: FRACTIONS: $\pm 1/64$ ANGLES: $\pm 1/2^\circ$		DRAWN RL	05/12/06					
BASIC DIMENSION	DECIMALS 2 PLACE 3 PLACE	APRVD.		OUTLINE, CH235H-35 DIRECTIONAL COUPLER		SIZE A	REVISION D	
UNDER 6"	$\pm .03$ $\pm .005$	MATERIAL ALUM. BODY				CAGE CODE OR8N4	ATM DWG # 5047W	
6" - 12"	$\pm .04$ $\pm .010$	TREATMENT				SCALE 1 : 1	MODEL # CH235H-35	SHEET 1/1
OVER 12"	$\pm .06$ $\pm .015$	FINISH ATM STD. GREY						