
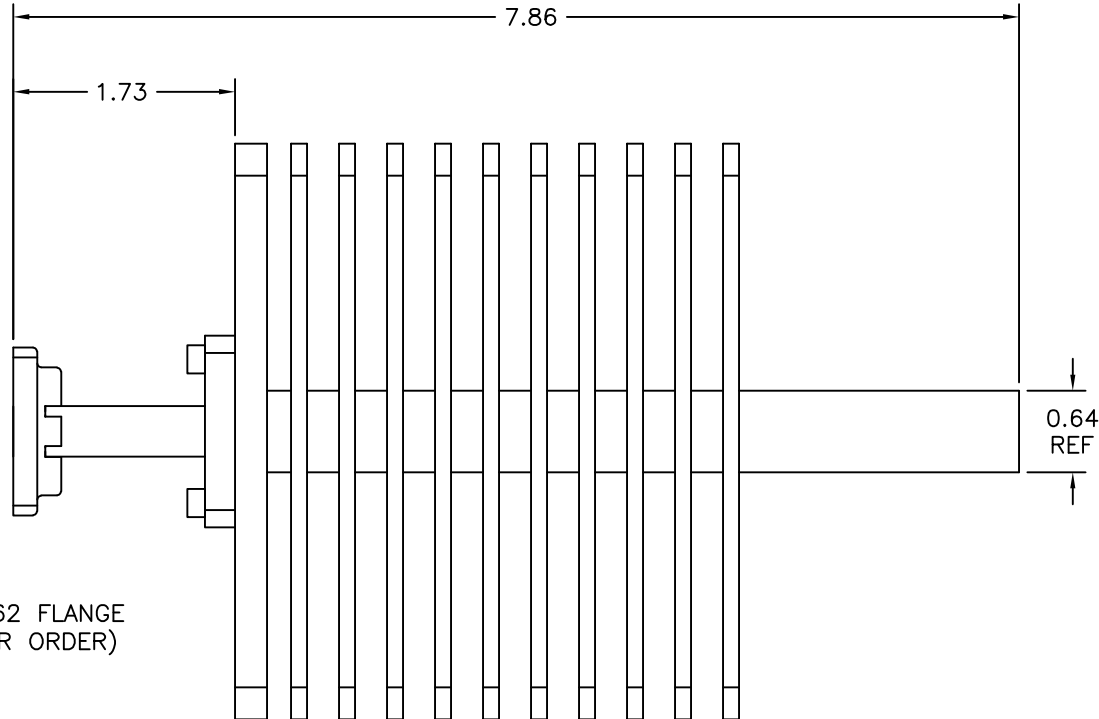


REV A	AUTH RL	DATE 10/10/02	INITIAL RELEASE
B	JLE	10/11/02	LENGTH 7.5" WAS 7.75", DIM 1.69" WAS 1.94" CORNER CHAMFERS .25" WERE .125"
C	JLE	12/10/02	4.5" SQ. FINS WERE 4" SQ., CLEAR DIST 1.73" WAS 1.69"
D	RL	10/30/03	UPDATED FORMAT, NOTES
E	RL	11/14/03	LENGTH 7.86 WAS: 7.50
F	MR	11/12/09	FREQ. RANGE CORRECTED, WAS 11.9-18.0 GHz
G	DM	01/09/13	CHANGED POWER, WAS 1400w (PER ECN 12-06-12-01) ; UPDATED TITLE BLOCK
H	RL	06/08/17	FORMAT UPDATE

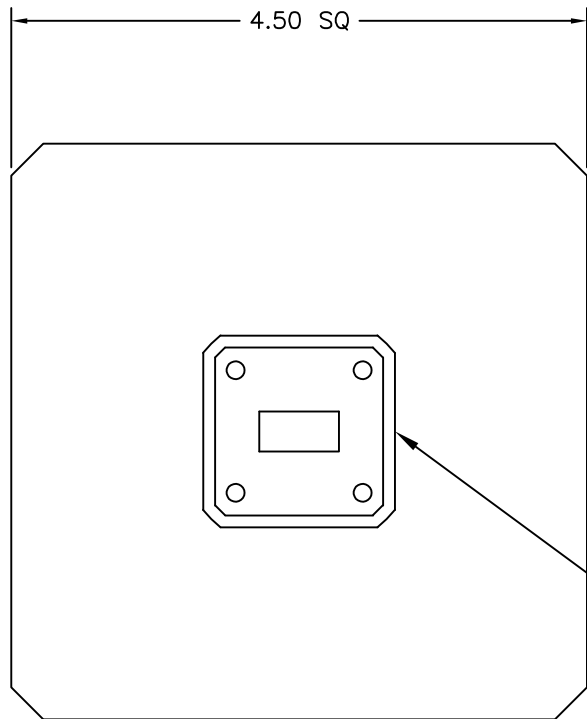

WR62 FLANGE
(PER ORDER)

MODEL SPECIFICATIONS

MODEL CODE: 62-760-FLANGE TYPE*
 MATERIAL: WR62 ALUMINUM
 FREQ. RANGE: 12.4 - 18.0 GHz
 POWER: 900W AVG
 VSWR: 1.15 MAX
 FINISH: HIGH TEMP BLACK
 FLANGE TYPE: SEE TABLE

*ATM MODEL # DESIGNATION FOR COMMON FLANGE TYPES
1 = CPRG
2 = CPRF
6 = UG COVER
7 = UG CHOKE
8 = SPECIAL

NOTES:

1. SHOWN WITH COVER FLANGE (STANDARD).

THIRD ANGLE PROJECTION:	APPROVALS	DATE		L-3 Narda - ATM TEL: (631) 289-0363 FAX: (631) 289-0358 www.atmmicrowave.com		THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT THE PRIOR WRITTEN CONSENT OF L3 NARDA-ATM, INC. DO NOT SCALE DWG.
	DRAWN RL	10/10/12		OUTLINE WR62 VHP TERMINATION		
UNLESS OTHERWISE NOTED, DIMENSIONS ARE IN INCHES, TOLERANCES ARE: FRACTIONS: ±1/64 ANGLES: ±1/2° MACHINED FINISH 63 ✓ OR BETTER	CHKD.		SIZE A CAGE CODE OR8N4		ATM DWG # 5150	REVISION H
DECIMALS 2 PLACE 3 PLACE	APRVD.		SCALE 1 : 1		MODEL # 62-760-X	SHEET 1/1
±.01 ±.005	MATERIAL -					
	TREATMENT -					
	FINISH -					