
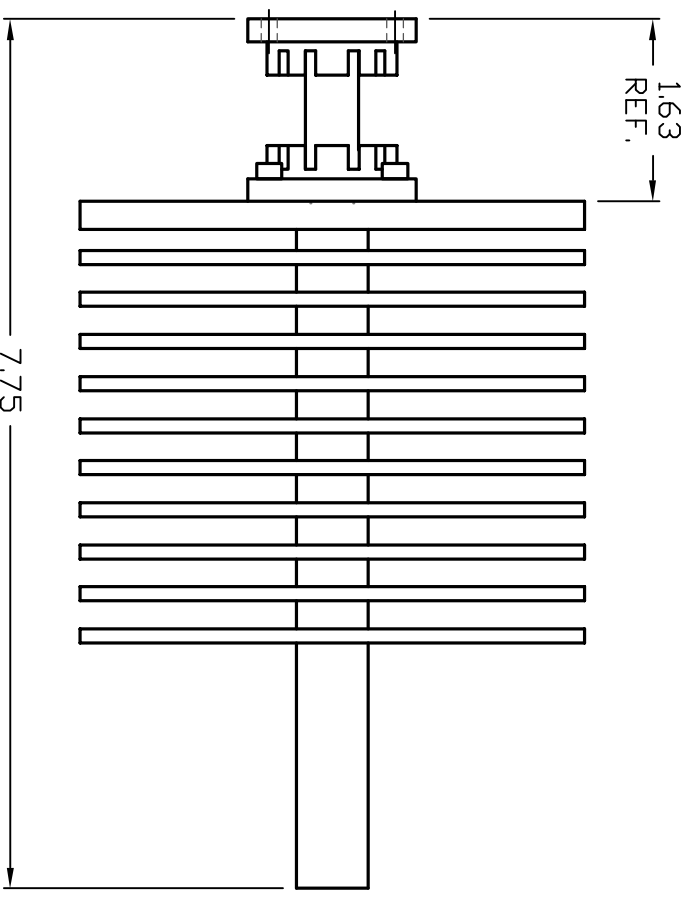


REV: C	DATE: 15/05/02	REDRAWN WITH DESIGN CHANGE	APPROVED
REV: D	DATE: 12/12/03	2-PIECE HOUSING IMPLEMENTED LENGTH 7.75 WAS 7.25, 1.63 WAS 1.48 VIEWS CHANGED TO SHOW INPUT	APPROVED

FLANGE AS PER
CUST. REQUEST
(COVER SHOWN)

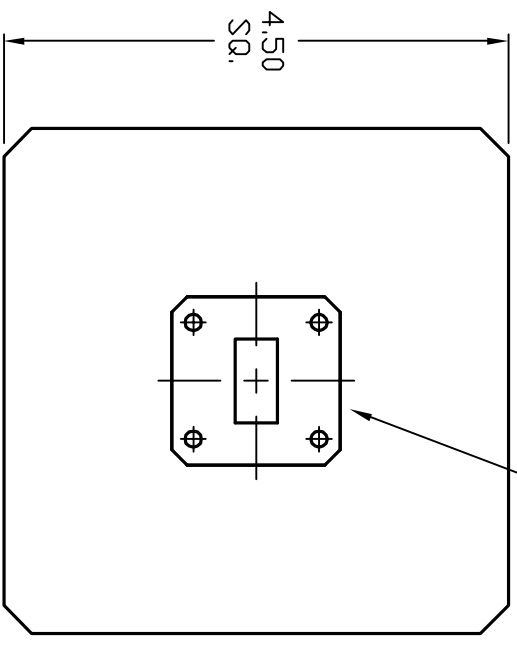

Model Number: 75-760-X
 Waveguide Size: WR75
 Flange: As Per Req.** (Cover shown)
 VSMR: 1.15 Max.
 Frequency Range: 10-15 GHz
 Convection Cooling: 1400 (W)
 Forced Air Cooling: 2000 (W)

*ATM MODEL# DESIGNATION FOR COMMON FLANGES
1 = CPRG
2 = CPRF
6 = UG COVER
7 = UG CHOKE
8 = SPECIAL

MATERIAL: ALUMINUM	TREATMENT: IRIDITE	DRAWN: J. EAGAN	DATE: 12/05/02
FINISH: HI TEMP BLACK	MOD. NO.: 75-760-X	CHECKED:	DATE:
OUTLINE DRAWING		APPROVED:	DATE:
WR75 HP TERMINATION		CAGE CODE: OR8N4	DO NOT SCALE DWG
BRICK LOAD			

ADVANCED TECHNICAL MATERIALS, INC.
 49 RIDER AVE., PATCHOGUE N.Y. 11772
 TEL: (631) 289-0386 FAX: (631) 289-0358
 http://www.atmicrowave.com

ERRORENEOUS NOTICE:
 THE INFORMATION IN THIS DRAWING IS THE PROPERTY OF ATM, INC. IT IS TO BE USED OR DISCLOSED WITHOUT THE PRIOR WRITTEN CONSENT OF ATM, INC.

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES
 TOLERANCES ARE:
 FRACTIONS ±1/64
 DECIMALS ±.01
 ANGLES ±1/2

SCALE: NONE
 DWG. NO.: 2673
 SHEET: 1/1
 REV: D

