
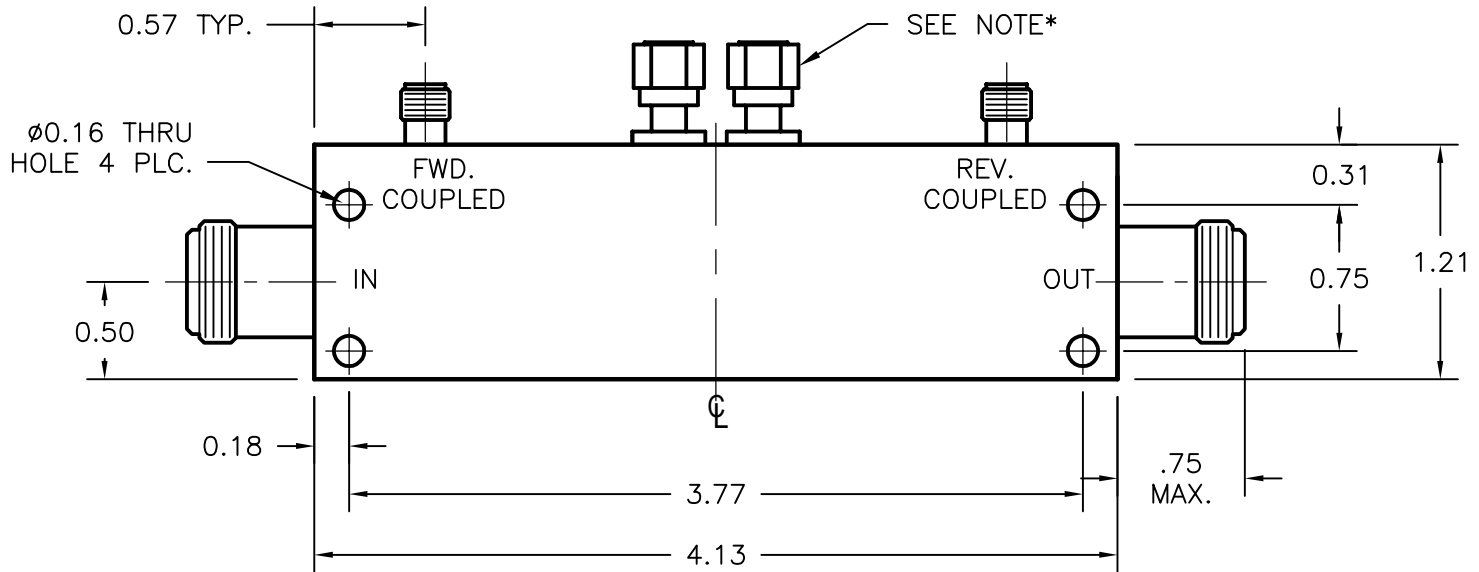


REV A	AUTH RL	DATE 07/19/01	INITIAL RELEASE
REV B	AUTH RL	DATE 08/30/07	FORMAT UPDATED, TERMINATION NOTE ADDED.

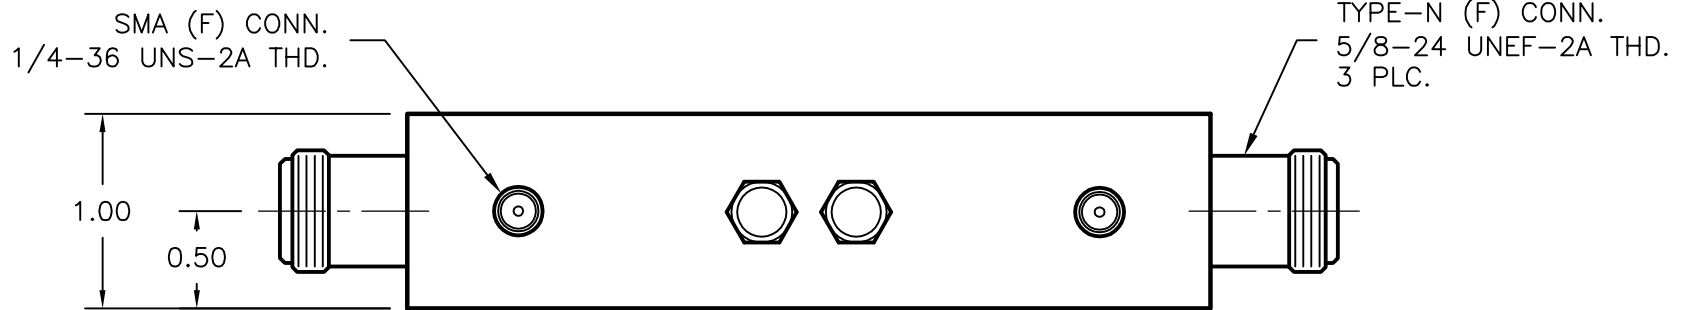

**NOTES:**

- \*NOTE: SECONDARY TERMINATION(S) CAN BE INTERNAL OR EXTERNAL DEPENDING ON MODEL AND SHOULD NOT BE REMOVED. FOR CONNECTORIZED LOADS CONSULT FACTORY.

THIRD ANGLE PROJECTION:		APPROVALS	DATE		ADVANCED TECHNICAL MATERIALS, INC.		THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT THE PRIOR WRITTEN CONSENT OF ATM, IN DO NOT SCALE DWG.
UNLESS OTHERWISE NOTED, DIMENSIONS ARE IN INCHES. TOLERANCES ARE: FRACTIONS: ±1/64 ANGLES: ±1/2°		DRAWN RL	07/19/01		TEL: (631) 289-0363 FAX: (631) 289-0358		
BASIC DIMENSION		DECIMALS		APRVD.		OUTLINE, HP (600W)	
		2 PLACE	3 PLACE			DUAL COAX DIRECTIONAL COUPLER, INLINE	
UNDER 6"	±.02	±.005		MATERIAL -		SIZE A	REVISION B
6" - 12"	±.03	±.010		TREATMENT -		CAGE CODE OR8N4	ATM DWG # 4452W
OVER 12"	±.06	±.015		ATM STD. GREY		SCALE 1 : 1	MODEL # CHP27XX-XXF-XXR
						SHEET 1/1	