


APPLICATION TABLE / PERFORMANCE SPECS						
MODEL#	FREQ RANGE	ISOLATION	VSWR	INS. LOSS	AMPL BAL	PHASE BAL
P213H	1.0-2.0GHz	10dB	IN: 1.67:1	1.0dB	±0.2dB	±5.0°
			OUT: 1.40:1			
P214H	2.0-18.0GHz	18dB	IN: 1.40:1	1.0dB	±0.2dB	±5.0°
			OUT: 1.40:1			
P213H/E20139-000	5.8-15.0GHz	18dB	IN: 1.40:1	1.0dB	±0.2dB	±5.0°
			OUT: 1.40:1			

REVISIONS				
ZONE	LTR	DESCRIPTION	DATE	APPROVED
	B	ATM RELEASE, FORMAT UPDATE	03/29/22	M. Rotunda

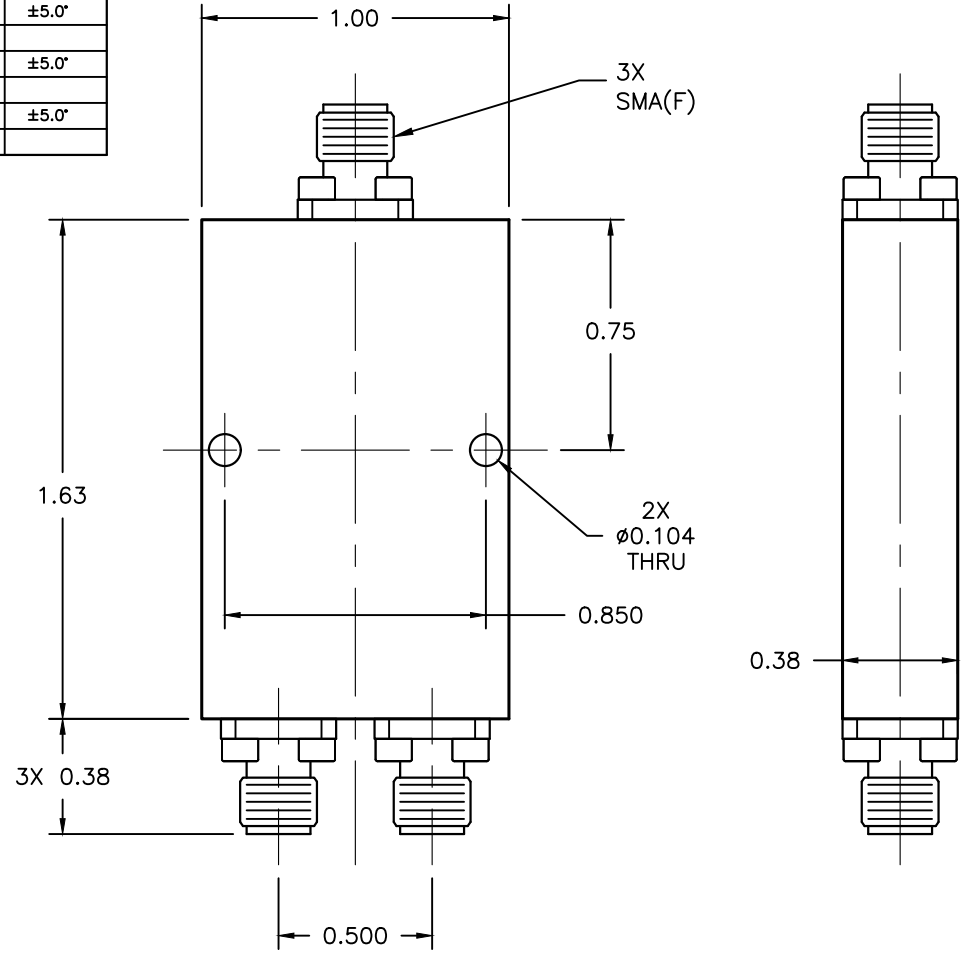

**MODEL SPECIFICATIONS**

**MECHANICAL**

MODEL NUMBER: SEE TABLE

MATERIAL:

BODY: 6061/T-6 ALUM.

CONNECTORS: STAINLESS STEEL

FINISH: UNIQUE CORROSION RESISTANT  
316 STAINLESS STEEL EPOXY COATING  
(MOUNT HOLES, CONNECTOR THREADS  
TO BE FREE OF PAINT)

PRINT NOT ON AUTOMATIC DISTRIBUTION VERIFY REVISION PRIOR TO USE

Narda-MITEQ PROPRIETARY THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY TO NARDA-MITEQ. THE CONTENTS SHALL NOT BE DISCLOSED, COPIED, DISTRIBUTED, OR USED UNLESS AUTHORIZED BY AN OFFICER OF NARDA-MITEQ.	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON DECIMALS      ANGLES .XX ± .02    .XXX ± .005    ± 0° 30'		<b>13701</b>		 435 MORELAND RD HAUPPAUGE, NY 11788
	PROJECTION		APPROVED BY PROJ ENGR <i>J. Crispino</i> 03/29/22 DRAFT DESIGN <i>M. Rotunda</i> 03/29/22 MFG ENGR QA <i>C. Latwails</i> 03/29/22		
THESE ITEM(S)/TECHNOLOGY CONTAIN INFORMATION SUBJECT TO U.S. GOVERNMENT EXPORT CONTROL IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS (EAR), 15 CFR PARTS 730-744. EXPORT OF THIS DATA TO ANY FOREIGN COUNTRY OR DISCLOSURE OF THIS DATA TO ANY NON-US PERSON MAY BE A VIOLATION OF FEDERAL LAW.	NEXT ASSY	USED ON	MATERIAL	FINISH	SIZE <b>C</b> CODE IDENT. NO. <b>94S46</b> REV. <b>B</b> <b>227304</b>
APPLICATION			AUTOCAD FILE FORMAT		SCALE N.T.S.    REF    SHEET 1 OF 1

227304

AUTOCAD 9.3022