
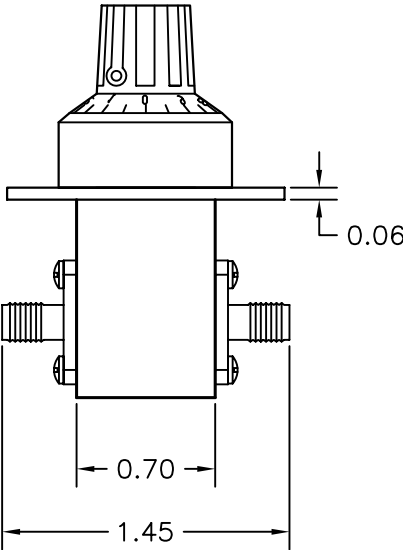
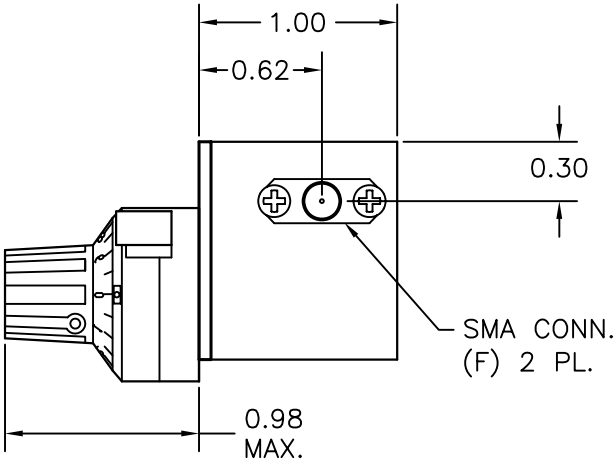


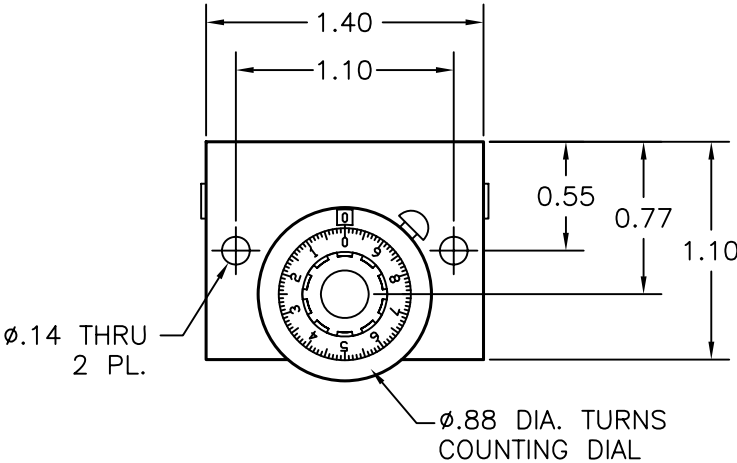

FREQ. (MHz)	ATTEN. (dB)	INS. LOSS (dB MAX.)	FLATNESS (+/- dB)	VSWR (MAX.)	MODEL NO. (50 OHM)	MODEL NO. (75 OHM)
DC-100	0-15	0.5	0.5	1.3	AF830-15	AF830-15/75
DC-200	0-15	0.5	0.5	1.4	AF831-15	AF831-15/75
DC-500	0-15	0.5	1.0	1.8	AF832-15	AF832-15/75
DC-1000	0-10	1.0	1.5	2.0	AF833-10	N/A

MATERIAL		TREATMENT		DRAWN R. LYNCH		DATE 1/14/03	
FINISH ATM STD. GRAY		MOD NO. AF83X-XX		CHECKED		DATE	
OUTLINE, AF83X-XX VARIABLE ATTENUATOR				APPROVED		DATE	
ADVANCED TECHNICAL MATERIALS, INC. 49 RIDER AVE., PATCHOGUE N.Y. 11772 TEL: (631) 289-0386 FAX: (631) 289-0358 http://www.atmmicrowave.com				UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES TOLERANCES ARE:		FRACTIONS ±1/64 DECIMALS ±.01 ANGLES ±1/2°	
						SCALE 1 : 1	
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT THE PRIOR WRITTEN CONSENT OF ATM, INC.				DWG. NO. 3521W		SHEET. 1/1 REV. A	