
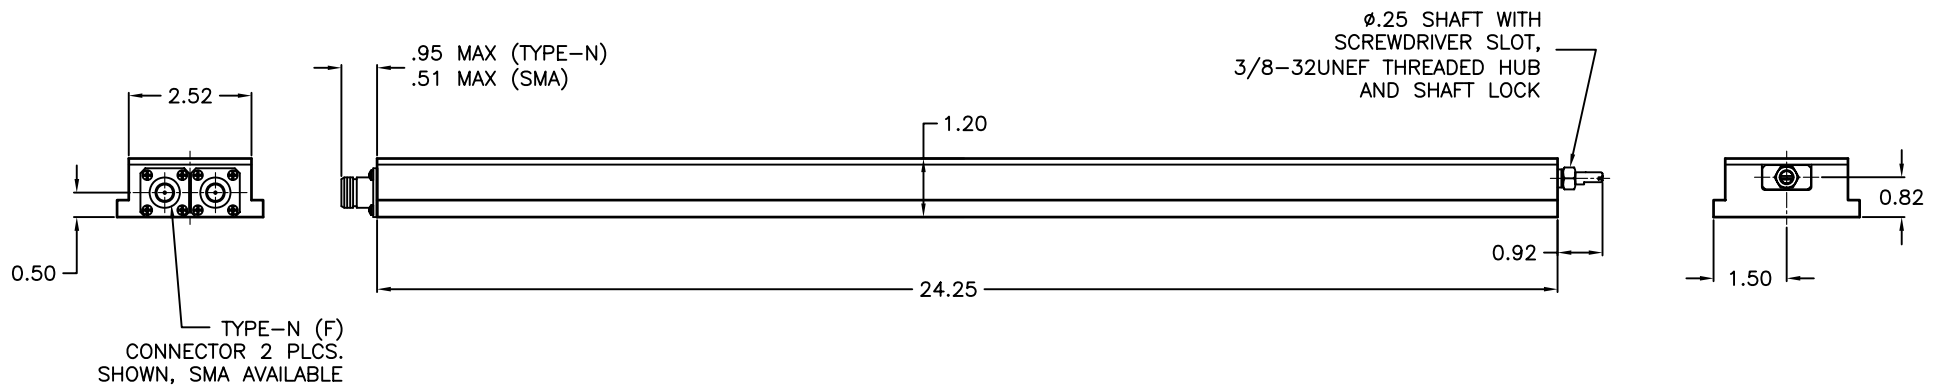


REV A	AUTH R.L.	DATE 07/16/01	INITIAL RELEASE
REV B	AUTH M.R.	DATE 11/14/11	FORMAT UPDATE, ADDED LOCKING NUT, UPDATED NOTE. TITLE UPDATED

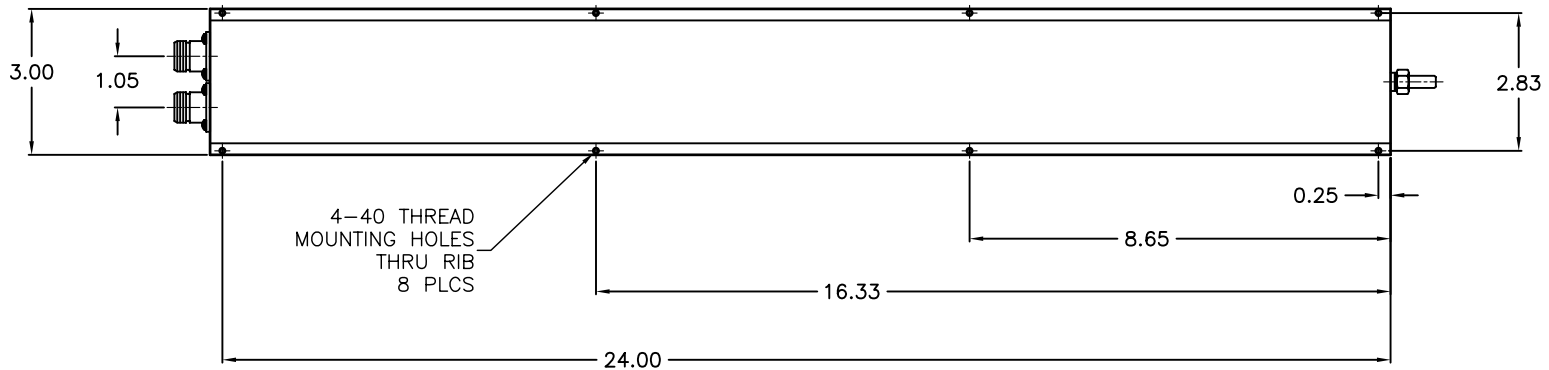

NOTES:

1. ALL MODELS HAVE AN RF POWER RATING OF 100W AVERAGE & 3 KW PEAK.

THIRD ANGLE PROJECTION:		APPROVALS	DATE	ADVANCED TECHNICAL MATERIALS, INC. TEL: (631) 289-0363 FAX: (631) 289-0358 www.atmmicrowave.com		<small>THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT THE PRIOR WRITTEN CONSENT OF ATM, INC. DO NOT SCALE DWG.</small>				
UNLESS OTHERWISE NOTED, DIMENSIONS ARE IN INCHES. TOLERANCES ARE: FRACTIONS: ±1/64 ANGLES: ±1/2° MACHINED FINISH 63 ✓ OR BETTER		DRAWN R.L.	07/16/11	OUTLINE 360°/GHz PHASESHIFTER - STD SHAFT				REVISION B		
DECIMALS 2 PLACE 3 PLACE		CHKD.						SIZE A	CAGE CODE OR8N4	ATM DWG # 4350W
±.01 ±.005		APRVD.						SCALE 1 : 1	MODEL # P11XX, P21XX	SHEET 1/1
		MATERIAL ALUM ALLOY BODY								
		TREATMENT CHEM FILM								
		FINISH ATM STD GRAY								