
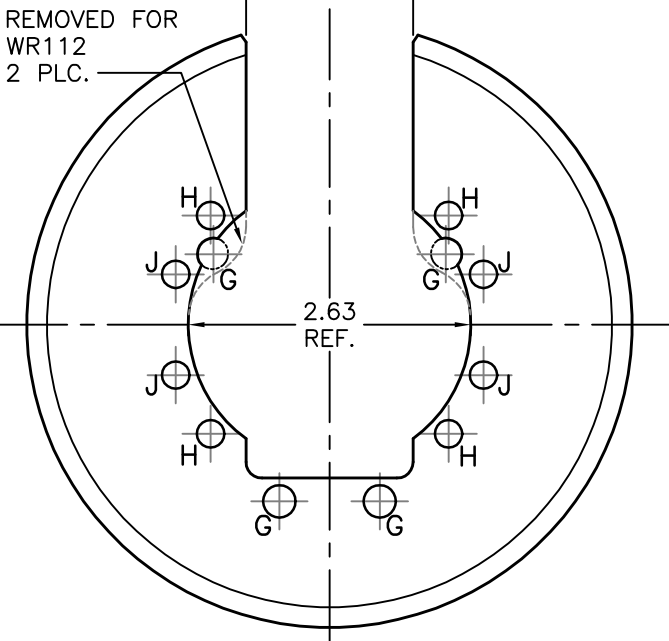
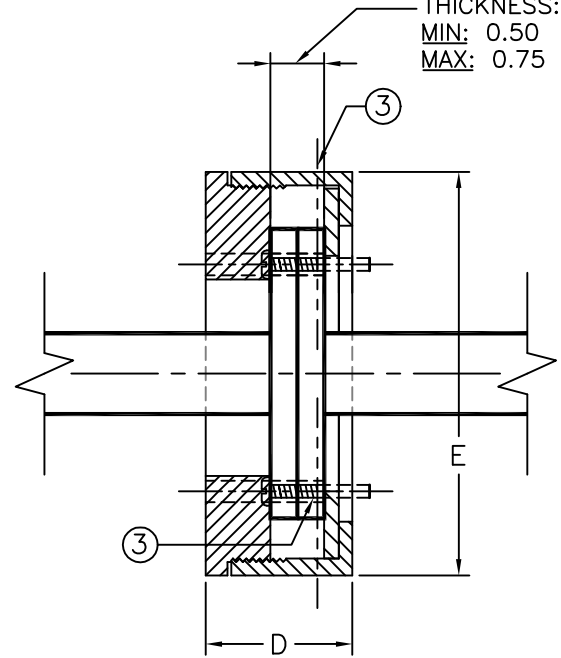


NOTES:

- ① MOUNT MALE TO FLANGE WITH SCREW PROJECTING FOR FLANGE ALIGNMENT. NOTE: FLANGE MUST BE TAPPED.
- ② MOUNT B TO C – SNAP FIT.
- ③ CUT NYLON SCREWS TO LENGTH SO AS NOT TO PROTRUDE THROUGH MATING FLANGE.
- ④ MATE FLANGES & SCREW TIGHT.

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED
	A	INITIAL RELEASE	4/11/01	

COMBINED
FLANGE
THICKNESS:
MIN: 0.50
MAX: 0.75

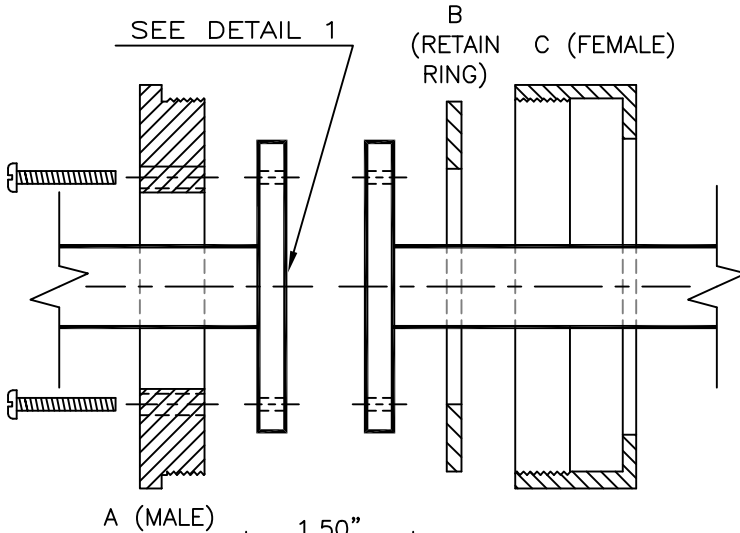

MODEL NO.	DIMENSION	
	D	E
QD-112	1.50 (38.1)	3.75 (95.3)
QD-137	1.50 (38.1)	3.75 (95.3)

FLANGE	HOLE SET
CPR137F/G	G
WR112 COVER	H
CPR112F/G	J

① HOLE LAYOUT

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
FRACTIONS DECIMALS ANGELS
1/64 .01± ±1/2 DEG.

PROPRIETARY NOTICE
The information contained in this drawing is proprietary and shall not be used or disclosed without the prior written consent of ATM, Inc.

DRAWN R. LYNCH DATE 4/11/01

ADVANCED TECHNICAL MATERIALS, INC.
49 RIDER AVENUE, PATCHOGUE N.Y. 11772
TEL: (516) 289-0363 FAX: (516) 289-0358

MATERIAL
6061
Aluminum
FINISH
XXXXX
XXXXX



CHECKED

APPROVED

WR112/137 QUICK DISCONNECT
OUTLINE-INSTRUCTION

SIZE	FSCM NO.	DWG NO.	REV
A	OR8N4	4221	A

DO NOT SCALE DRAWING

SCALE: None

SHEET 1 OF 1