
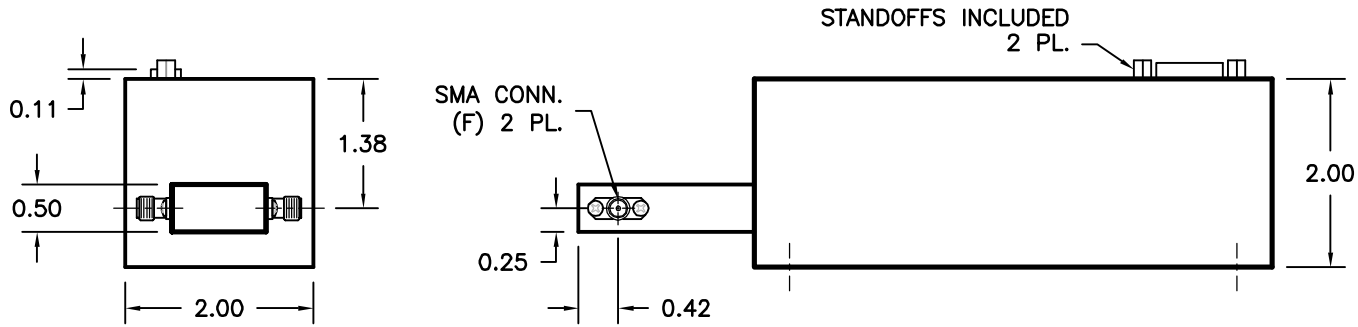
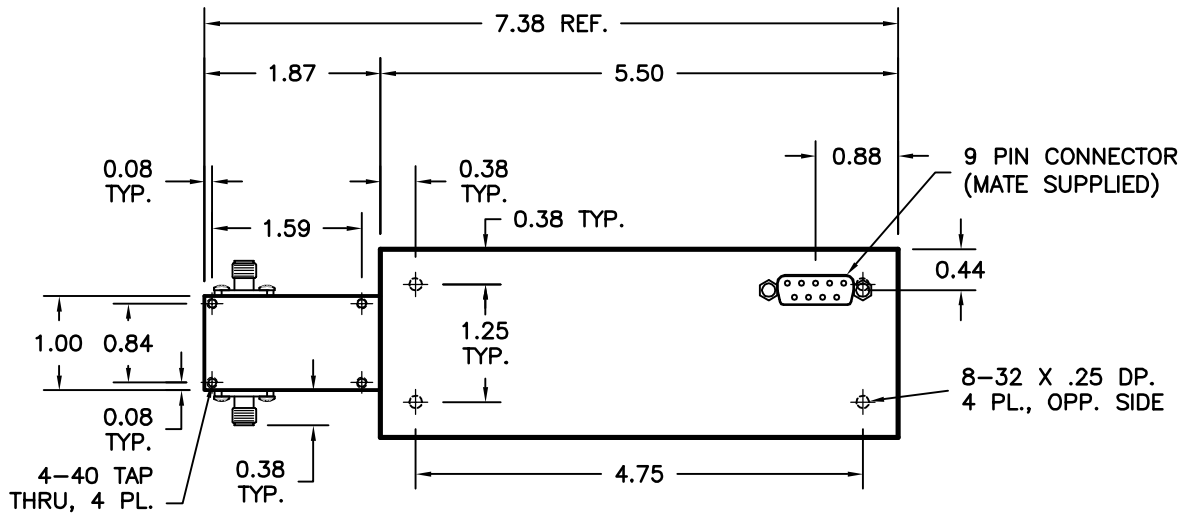


REV. A	AUTH. RL	DATE 09/27/02	INITIAL RELEASE	APPROVED
REV. B	AUTH. RL	DATE 11/22/05	REMOVED FUSE, LINETYPES, TITLE BLOCK UPDATE	APPROVED

9-PIN CONNECTOR WIRING DIAGRAM (ATTENUATOR)

PIN#	FUNCTION
-2	INCREASE ATTENUATION
+7	DECREASE ATTENUATION
+2	DECREASE ATTENUATION
-7	INCREASE ATTENUATION
+1	END POINT INDICATOR (MAX.)
6	END POINT INDICATOR (MIN.)
-3	END POINT INDICATOR (MIN.)
8	END POINT INDICATOR (MAX.)
5	WIPER (TRACKING POT)
4	TRACKING POT
9	TRACKING POT

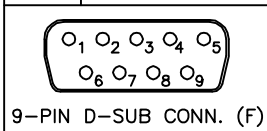

- NOTES:
- 10K POT USED.
 - SMA CONNECTOR IS MODIFIED TO MEET COMPONENT SPECIFICATIONS.
 - SMA CONNECTOR WILL MATE WITH 2.9MM CONNECTOR.

MATERIAL -	TREATMENT -	DRAWN RL	DATE 09/27/02
FINISH ATM GRAY	MOD NO. AV06-XX-28	CHECKED	DATE
<p align="center">OUTLINE, AV06 MOTOR-DRIVEN ATTENUATOR</p>		APPROVED	DATE
		CAGE CODE: OR8N4	DO NOT SCALE DWG
ADVANCED TECHNICAL MATERIALS, INC. 49 RIDER AVE., PATCHOGUE N.Y. 11772 TEL: (631) 289-0363 FAX: (631) 289-0358 http://www.atmmicrowave.com		UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES TOLERANCES ARE:	FRACTIONS ±1/64 DECIMALS ±.01 ANGLES ±1/2° SHEET. 1/1
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT THE PRIOR WRITTEN CONSENT OF ATM, INC.	SCALE 1 : 2 DWG. NO. 3207W REV. B